



## **TURBIDITY SENSOR 4112**

*is an 0-5V analog sensor designed for SEAGUARD<sup>®</sup> applications. The sensor fits directly onto the SEAGUARD<sup>®</sup> Top end Plate using one of the four analog channels.*

### **Features:**

- Optically confined sensing volume.
- Insensitive to ambient light when under water
- Linear output over more than 5 decades.
- 4 selectable ranges.
- Optic feedback compensated for temperature drift and aging of optical components.
- Very low offset voltage does not require adjustment.
- Very low power requirements.

### **Application Areas:**

- Pollution monitoring.
- Water and wastewater quality.
- Sediment transport.
- Ocean profiling.
- River and stream monitoring.

The Turbidity sensor 4112 is based on the Seapoint Turbidity Meter. The sensor detects light scattered by particles suspended in water.

This measurement is known to have a good correlation to the amount of suspended matter in water and can be used to monitor e.g. sediment, algae or particle pollution. The sensor generates an output voltage proportional to the turbidity or suspended solids.

The low power consumption makes it ideal for applications where battery drain is a concern.

The sensor offset voltage is within 1mV of zero and requires no adjustment across gains.

The unique optical design confines the sensing volume to within 5cm of the sensor allowing near-bottom measurements and minimizing errant reflections in restricted spaces.

Turbidity sensor 4112 can be mounted directly on the top-end plate of the AADI SEAGUARD<sup>®</sup>; the sensor output is analog, and output from SEAGUARD<sup>®</sup> is in engineering units (FTU).

# Specifications

D377 - October 2009



## Operating Range:

Model:	Range: (FTU)	Sensitivity: (mV/FTU)	Gain:
4112	0 - 25	200	100x
4112A	0 - 125	40	20x
4112B	0 - 500	10	5x
4112C	0 - 2500*	2	1x

(\* the sensor output is non-linear above 750FTU)

**Operating Temperature:** 0°C to 65°C (32°F to 149°F)

**Output Signal:** 0-5.0 Vdc

**Output Time Constant:** 0.1 sec

**Power Requirements:** 7-20 Vdc  
Average: 3.5 mA  
Peak: 6 mA

**RMS Noise:** < 1 mV

**Power-up Transient Period:** < 1 sec

**Light Source Wavelength:** 880 nm

**Sensing Distance:** < 5 cm (approx.) from windows

**Linearity<sup>1)</sup>:** < 2 % deviation 0-750 FTU

**Temperature Coefficients:** < 0.05% per degree Celcius


**Depth Capability:** 300 m ( 984 ft)

**Weight (in air):** 86 g (3.0 oz)

**Materials:** ABS plastic, Epoxy, Stainless Steel 316

**Electrical Connection:** 10-pin receptacle mating plug

## PIN CONFIGURATION

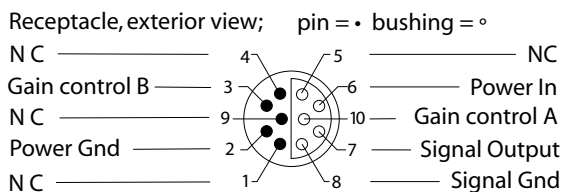

NC: not connected.

1) The sensor is delivered adjusted for linearity in the range 0-750 FTU. To obtain an absolute calibration, referred to a laboratory reference instrument, please order calibration for the selected range.

*Specifications subject to change without prior notice.*

Latest version on internet

Post Box 34 SLÅTTHAUG  
5851 BERGEN, NORWAY  
TEL. +47 55 60 48 00  
FAX. +47 55 60 48 01

<http://www.aadi.no>  
e-mail: [info@aadi.no](mailto:info@aadi.no)

**AADI**  
AANDERAA DATA INSTRUMENTS

Representative's Stamp

AADI, a Nova Analytics company 